

**VECTOR OPTICS<sup>®</sup>**

**2020 PRODUCT CATALOG**

---

# Index

Our Culture.....	1-6
Featured Products.....	7-32
Second Focal Plane.....	33-38
Red Dot Sights.....	39-48
Binoculars.....	49-50
Rangefinder.....	51
Spotting Scope.....	52
Handguard Rails.....	53-58
Other Rails.....	59-66
Laser & Flashlights.....	67-72
ACD Leveling Mounts.....	73
Scope Rings.....	74-79
Snap Caps.....	80
Cleaning Tools.....	81
Others.....	82-84
Products RD & Testing.....	85-87







TAURUS 4-24X50



# Five Years Warranty

---

All Vector Optics products are covered by the 5 years warranty. Your Vector Optics product is warranted free of defects in materials and workmanship for a period of 5 years from time of purchase by the original purchaser. This warranty covers accidental damage, as well as any defects in materials and workmanship. In the event of a defect under this warranty, we promise to repair or replace your products and ship it back to you at absolutely free of charge.

No warranty card need to be fill out. Contact us via [service@vectoroptics.com](mailto:service@vectoroptics.com), online store or Facebook to get after-sales service.

Please note that batteries, damages caused by misuse or improper handling are not covered. Also, this warranty is null and void if modification or maintenance is provided by someone other than Vector

[www.vectoroptics.com](http://www.vectoroptics.com)



# Vector Optics Tailed VIP Lifetime Warranty

Your Vector Optics Continental, Taurus, Aston, Scrapper and Frenzy line products are covered by our T-VIP lifetime warranty. We will, at our option, either repair or replace your Vector Optics product without any cost if it is damaged or defective. If we can't repair your damaged product, we will replace it with a brand new one in perfect condition. We proudly stand behind all our Vector Optics products with this warranty. You have our word that we will do what it takes to retain your business as a satisfied customer. You can count on our T-VIP lifetime warranty.

Unlimited full lifetime warranty:

- ◆ *Reply to you in 1 working day.*
- ◆ *Free repair or replacement.*
- ◆ *Fully transferable.*
- ◆ *No invoice or receipt needed.*
- ◆ *No question asked, however, we do appreciate your feedback.*
- ◆ *We pay for shipping back to you.*

This warranty does not cover the product loss, theft, deliberate damage, abuse, misapplication or modification.

This warranty does not apply to the electronic components or batteries.

For warranty service please contact our Customer Service Department online at [service@vectoroptics.com](mailto:service@vectoroptics.com) for return instructions. If you need to return the product, please insure the shipment and keep the tracking records.

We can not be responsible for your product until it has been received by our Customer Service Department.

[www.vectoroptics.com](http://www.vectoroptics.com)



# Optics Features



Infinity



Shock Proof



E & W



Reset to Zero



Nitrogen



Water Proof



FMC



5 Levels  
Illumination  
R&G



7 Levels  
Illumination  
R&G



11 Levels  
Illumination  
R&G



3x Zoom



4x Zoom



5x Zoom



6x Zoom



Hunting Style



Tactical Style



With Rings



Sunshade



Open Shooting



Honeycomb



Lens Cover



1" Tube



30mm Tube



34mm Tube



35mm Tube



High Light  
Transmission



R&G Laser



Flip-up Cap



# The Pride of China Made Scope

## LaREE Lens

Lanthanide Rare Earth Element optical glasses by cold forming

- high refraction index
- extra low Abbe number



Periodic Table of Elements

1	2																	10	11																																																																														
3	4																	12	13	14	15	16	17	18																																																																									
5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20											36	37	38	39	40																																																																			
21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118
119	120																	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180																					



Your Scope Is Armed by LaREE Optical Glasses



## Capped & Turret Adjustment

- For general hunting & most big game hunting etc.
- Low profile 1/2 or 1/4 MOA
- Re-zero setting

- For tactics & long range shooting
- 1/10MIL, 80 clicks / round
- Turret lock system



Never snag on anything and never get turned  
 Made of 7075 alloys with fine & precise threads  
 Sophisticated CNC machining, crisp & accurate  
 Only skilled engineer can assemble the components

The Spirit of the Scope




## VePRO FMC

All the Lenses FMC are state-of-art crafted in-housing coating lab

VePRO™ stands for Vector Premium Reliable Optoelectronic FMC

Anti Reflection Broadband FMC Excellent for Dawn and Dusk Shooting


Max the optimization of color rendition, resolution, contrast & light transmission

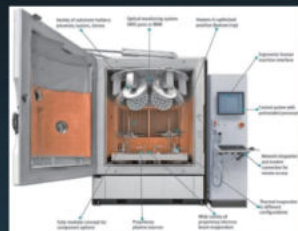

Coating Machine



99.3% to 99.5% light transmission for each lens



Normal Lens



VePRO FMC

Repel Water, Grease, Fog, Debris & Dust




## What We Use for Inspection

1300mm Focus Optical Collimator

Extreme High & Low Temperature

Punch Recoil Iron Hammer Kit

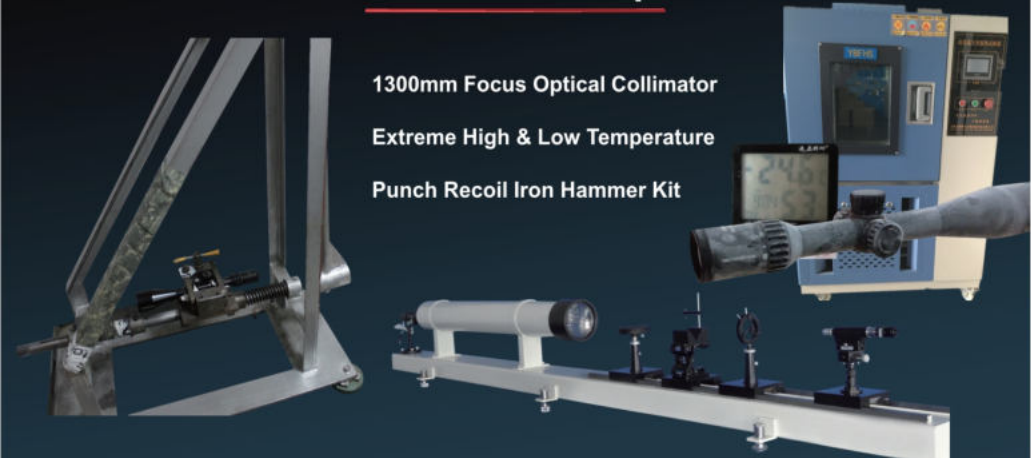

Use Laboratory Facilities to Inspect Product





# Taurus

## Feature

- First Focal Plane Etched Reticle
- Dead-on Accurate MIL Tactical Low Turrets w/ Lock Function
- Center Dot w/ 6 Levels Illumination
- Crystal Clear Edge-to-Edge Image
- Extra-Low Dispersion
- Long Range Precision Shooting & Hunting, Tactical Engagements





Magnification	1-6x	3-18x	4-24x	5-30x
Objective Lens Dia.	24mm	50mm	50mm	56mm
Exit Pupil	8-3.5mm	16.6-2.7mm	12.5-2.1mm	11.0-1.8mm
F.O.V (@100yds)	110-18 feet	32.9-5.8 feet	9.1-1.5m	20.4-3.5 feet
Eye Relief (mm / inch)	100-90 / 4.0-3.5	100 / 4.0	100 / 4.0	100 / 4.0
Length (mm / inch)	275 / 10.8	335 / 13.2	380 / 15.0	400 / 15.7
Weight (net, g / oz)	545 / 19.2	750 / 26.5	770 / 27.2	815 / 28.7
Tube Dia.	30mm	30mm	30mm	30mm
Elevation Range	60 MIL	17.5 MIL	15 MIL	12 MIL
Windage Range	60 MIL	17.5 MIL	15 MIL	12 MIL
Click Value	1/5 MIL	1/10 MIL	1/10 MIL	1/10 MIL
Parallax Adjustment	100 yards	15 yds to ∞	15 yds to ∞	20 yds to ∞
Reticle	VTC-T	MPX1	MPX1	MPX1
Illumination	6 levels R	6 levels R	6 levels R	6 levels R




**SCFF-27**  
1-6x24


**SCFF-11**  
3-18x50

**SCFF-17**  
4-24x50

**SCFF-14**  
5-30x56



VTC-T  
MIL



MPX1  
MIL



0.1 MRAD / 1cm Caps



FMC



With Rings



30mm Tube



Shock Proof



6x Zoom



IPX6 Waterproof

# Continental Hunting

## Feature

- HD Optics System w/ Crystal Clear Image
- Extra-Low Dispersion
- LaREE Lens & VePRO FMC Reaches 90% Light Transmission
- 4A Center Dot w/ 6 Levels Illumination
- Resettable Zero MOA Capped Adjustments
- Free Custom Spare Elevation Turret





Magnification	1-6x	1.5-9x	2-12x	3-18x	5-30x
Objective Lens Dia.	24mm	42mm	50mm	50mm	56mm
Exit Pupil	9.5-4.0mm	9.5-4.9mm	9.5-4.2mm	9.5-2.8mm	9.5-1.9mm
F.O.V (@100yds)	124.5-20.7 feet	84-14 feet	63-10.5 feet	41.5-6.9 feet	24.9-4.2 feet
Eye Relief (mm / inch)	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0
Length (mm / inch)	283 / 11.1	335 / 13.1	335 / 13.1	383 / 15.1	400 / 15.7
Weight (net, g / oz)	480 / 16.9	580 / 20.5	605 / 21.4	630 / 22.2	630 / 22.2
Tube Dia.	30mm	30mm	30mm	30mm	30mm
Elevation Range	140 MOA	140 MOA	140 MOA	75 MOA	60 MOA
Windage Range	140 MOA	140 MOA	140 MOA	75 MOA	60 MOA
Click Value	1/2 MOA	1/4 MOA	1/4 MOA	1/4 MOA	1/4 MOA
Parallax Adjustment	100 yards	100 yards	100 yards	10 yds to ∞	15 yds to ∞
Reticle	German #4	VET-10BDC	VET-10BDC	VET-10BDC	Half-mil
Illumination	6 levels R	6 levels R	6 levels R	6 levels R	6 levels R




**SCOC-23  
1-6x24**

**SCOM-23  
1.5-9x42**


**SCOM-15  
2-12x50**

**SCOL-21  
3-18x50**


**SCOL-22  
5-30x56**



German #4  
Setting: 6x, MOA



VET-10BDC  
Setting: 10x, MOA



Half-mil  
Setting: 20x, MOA



Custom Spare Elevation Turret



FMC



With Rings



30mm Tube



Shock Proof



6x Zoom




IPX6 Waterproof



# Continental Tactical

## Feature

- LaREE Lens & VePRO FMC Reaches 90% Light Transmission
- HD Optics System w/ Crystal Clear Image
- VCT Center Dot w/ 6 Levels Illumination
- Extra-Low Dispersion
- Resettable Zero Tactical 1/10 MIL Turrets
- Free Custom Spare Elevation Turret

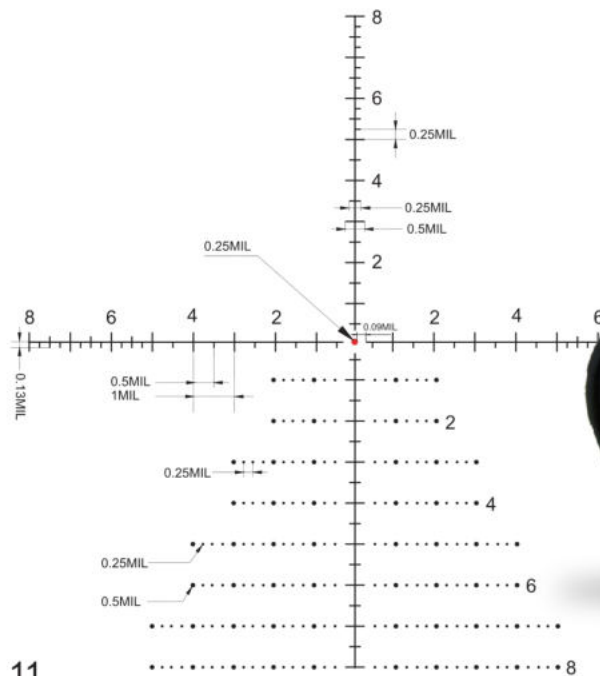


Magnification	3-18x	4-24x	5-30x
Objective Lens Dia.	50mm	50mm	56mm
Exit Pupil	9.5-2.8mm	9.5-2.1mm	9.5-1.9mm
F.O.V (@100yds)	41.5-6.9 feet	31.1-5.2 feet	24.9-4.2 feet
Eye Relief (mm / inch)	100 / 4.0	100 / 4.0	100 / 4.0
Length (mm / inch)	385 / 15.2	370 / 14.6	400 / 15.7
Weight (net, g / oz)	675 / 23.8	625 / 22	725 / 25.6
Tube Dia.	30mm	30mm	30mm
Elevation Range	21.5 MIL	20 MIL	16.5 MIL
Windage Range	21.5 MIL	20 MIL	17.5 MIL
Click Value	1/10 MIL	1/10 MIL	1/10 MIL
Parallax Adjustment	10 yds to ∞	15 yds to ∞	15 yds to ∞
Reticle	VCT-10	VCT-20	VCT-20
Illumination	6 levels R	6 levels R	6 levels R




**SCOL-21T**  
**3-18x50**

**SCOL-33T**  
**4-24x50**

**SCOL-22T**  
**5-30x56**



VCT-10  
Setting: 10x, MIL



VCT-20  
Setting: 20x, MIL



**Custom Spare Elevation Turret**



**FMC**



**With Rings**



**30mm Tube**



**Shock Proof**



**6x Zoom**



**IPX6 Waterproof**



# Continental 34mm

## Feature

- LaREE Lens & VePRO FMC Reaches 90% Light Transmission
- HD Optics System Crystal Clear Image
- First Focal Plane Reticle w/ 6 Levels Illumination
- Extra-Low Dispersion
- A Sturdy 34mm Tube Provides Extreme Ruggedness & Reliability
- Tactical Precise Zero Stop Click-by-Click 1/10 MIL Turrets



Magnification	1-6x	3-18x	4-24x	5-30x
Objective Lens Dia.	28mm	50mm	56mm	56mm
Exit Pupil	8-4.6mm	8-2.8mm	8-2.3mm	8-1.8mm
F.O.V (@100yds)	122.5-20.4 feet	40.8-6.8 feet	30.6-5.1 feet	24.5-4.1 feet
Eye Relief (mm / inch)	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0
Length (mm / inch)	296 / 11.7	338 / 13.3	362 / 14.3	392 / 15.4
Weight (net, g / oz)	550 / 19.4	720 / 25.4	780 / 27.5	810 / 28.6
Tube Dia.	34mm	34mm	34mm	34mm
Elevation Range	52 MIL	44 MIL	34 MIL	26 MIL
Windage Range	52 MIL	44 MIL	34 MIL	26 MIL
Click Value	1/10 MIL	1/10 MIL	1/10 MIL	1/10 MIL
Parallax Adjustment	100 yds	10 yds to ∞	10 yds to ∞	10 yds to ∞
Reticle	VCT-34FFP	VCT-34FFP	VCT-34FFP	VCT-34FFP
Illumination	6 levels R	6 levels R	6 levels R	6 levels R




**SCFF-31  
1-6x28**

**SCFF-28  
3-18x50**

**SCFF-29  
4-24x56**

**SCFF-30  
5-30x56**



VCT-34FFP  
MIL



FMC



With Rings



34mm Tube



Shock Proof



6x Zoom



IPX6 Waterproof




# Aston

## Feature

- 6x Super-Zoom Factor
- Edgeless-to-Edgeless Image
- Extra-Low Dispersion
- 30mm Monotube in Rugged Construction
- Reliable Mechanics Provide Accurate MOA Clicks
- Designed for M / AR & Bolt Action Platforms




Magnification	1-6x	3-18x	5-30x
Objective Lens Dia.	24mm	44mm	56mm
Exit Pupil	24-4.0mm	14.7-2.5mm	11.2-1.87mm
F.O.V. (@100yds)	111.2-17.8 feet	37.7-6.3 feet	19.93-3.3 feet
Eye Relief (mm / inch)	90 / 3.5	97-87 / 3.8-3.4	124-86 / 4.9-3.4
Length (mm / inch)	265 / 10.4	335 / 13.2	400 / 15.7
Weight (net, g / oz)	470 / 16.6	750 / 26.4	835 / 29.5
Tube Dia.	30mm	30mm	30mm
Elevation Range	90 MOA	90 MOA	50 MOA
Windage Range	90 MOA	90 MOA	50 MOA
Click Value	1/2 MOA	1/4 MOA	1/4 MOA
Parallax Adjustment	100 yards	20 yds to ∞	20 yds to ∞
Reticle	VTC-A	VHL-2	VPA-A
Illumination	11 levels R	11 levels R	11 levels R

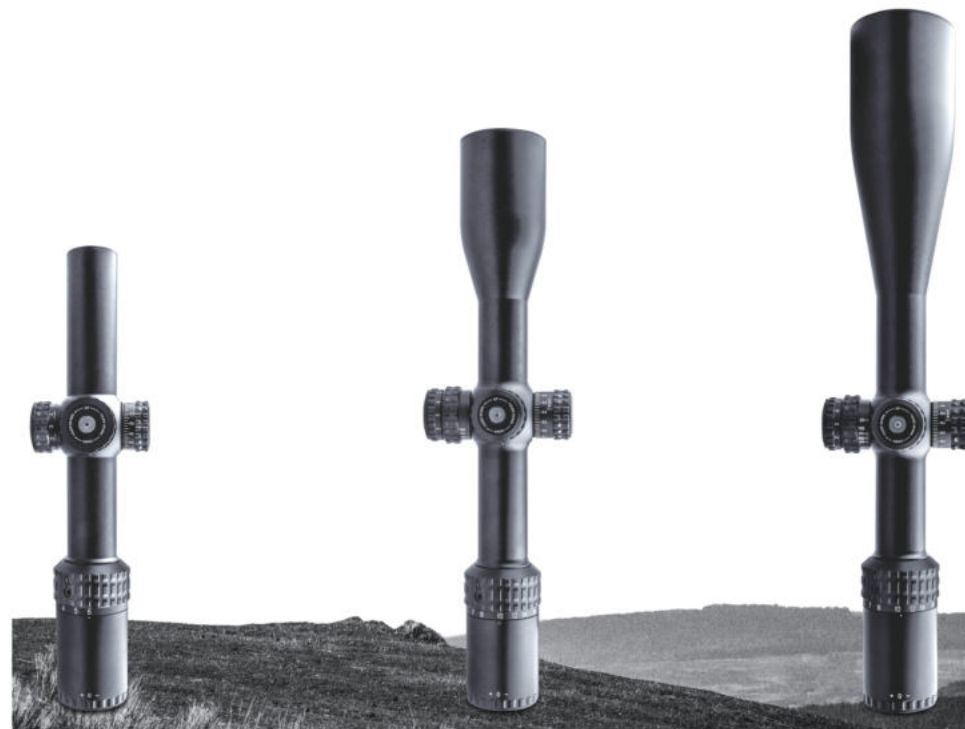


**SCOC-24**  
**1-6x24**

**SCOL-23**  
**3-18x44**


**SCOL-24**  
**5-30x56**



VTC-A  
Setting: 6x, MOA



VHL-2  
Setting: 10x, MOA



VPA-A  
Setting: 20x, MOA



FMC



With Rings



30mm Tube



Shock Proof



6x Zoom




IPX6 Waterproof



# Paragon GenII

## Feature

- Constant 4" Long Eye Relief w/ Wide F.O.V
- Etched Glass Reticle w/ Center Dot 6 Levels Illumination
- True 5x Zoom Factor 30mm Monotube in Rugged Construction
- Dead-on Accurate 1/10 MIL Tactical Turrets w/ Lock Function
- LaREE Lens & VePRO FMC Reaches 90% Light Transmission
- Hunting, Sporting & Competition

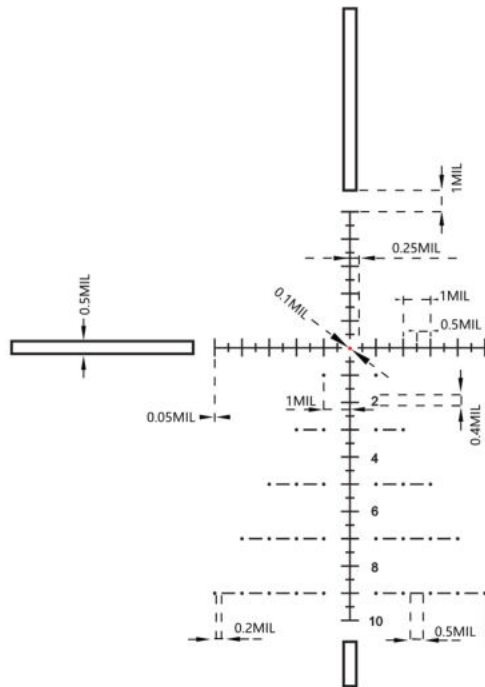

Magnification	1.2-6x	3-15x	5-25x	6-30x
Objective Lens Dia.	24mm	50mm	56mm	56mm
Exit Pupil	20-4.0mm	8-3.3mm	8-2.2mm	9.5-1.9mm
F.O.V (@100yds)	81.2-16.2 feet	37.5-7.5 feet	22.5-4.5 feet	18.8-3.8 feet
Eye Relief (mm / inch)	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0
Length (mm / inch)	250 / 9.8	335 / 13.2	365 / 14.4	400 / 15.7
Weight (net, g / oz)	485 / 17.1	625 / 22	375 / 23.8	705 / 24.9
Tube Dia.	30mm	30mm	30mm	30mm
Elevation Range	52 MIL	26 MIL	18.5 MIL	17 MIL
Windage Range	52 MIL	26 MIL	18.5 MIL	17 MIL
Click Value	1/5 MIL	1/10 MIL	1/10 MIL	1/10 MIL
Parallax Adjustment	100 yards	10 yds to ∞	15 yds to ∞	15 yds to ∞
Reticle	VTC-3	VPA-2	VPA-2	VPA-2
Illumination	6 levels R	6 levels R	6 levels R	6 levels R




**SCOC-04**  
**1.2-6x24**


**SCOM-25**  
**3-15x50**

**SCOL-26**  
**5-25x56**

**SCOL-27**  
**6-30x56**



VTC-3  
Setting: 6x, MIL



VPA-2  
Setting: 10x, MIL



FMC



With Rings



30mm Tube



Shock Proof



5x Zoom



IPX6 Waterproof



# Marksman

## Feature

- Etched Class MPN-1 Reticle
- Low Light Weight Design
- 1/10 MIL Low Profile Resetable Zero Turrets
- Fully Multi Coated Reaches 85-87% Light Transmission
- Offered in Second & First Focal Plane
- Free Lens Cover , Honeycomb Sunshade & 30mm Scope Rings



Magnification	10x	3.5-10x	4.5-18x	6-25x	4-16x	6-24x
Objective Lens Dia.	44mm	44mm	50mm	50mm	44mm	50mm
Exit Pupil	4.4mm	12.6-4.4mm	9.8-2.4mm	8.3-2.0mm	11-2.75mm	8.33-2.08mm
F.O.V (@100yds)	2.1°	30.4-11 feet	4.89-1.22°	3.4-0.85°	4.3-1.1°	3.2-0.5°
Eye Relief (mm / inch)	95 / 3.7	105-92 / 4.1-3.6	95 / 3.7	100-90 / 3.9-3.5	100-95 / 3.9-3.7	100 / 4.0
Length (mm / inch)	315 / 12.4	335 / 13.2	350 / 13.8	357 / 14.0	355 / 14.0	360 / 14.2
Weight (net, g / oz)	525 / 18.5	615 / 21.8	640 / 22.6	660 / 23.3	670 / 23.6	700 / 24.7
Tube Dia.	30mm	30mm	30mm	30mm	30mm	30mm
Elevation Range	18 MIL	18 MIL	15 MIL	15 MIL	25 MIL	17.5 MIL
Windage Range	18 MIL	18 MIL	15 MIL	15 MIL	25 MIL	17.5 MIL
Click Value	1/10 MIL	1/10 MIL	1/10 MIL	1/10 MIL	1/10 MIL	1/10 MIL
Parallax Adjustment	12 yds to ∞	15 yds to ∞	20 yds to ∞	20 yds to ∞	20 yds to ∞	10 yds to ∞
Reticle	MPN-1	MPN-1	MPN-1	MPN-1	VPA-MF	VPA-MF
Illumination	N / A	N / A	N / A	N / A	N / A	N / A



**SCOL-09**  
**10x44SFP**


**SCOM-04**  
**3.5-10x44SFP**

**SCOL-15**  
**4.5-18x50SFP**


**SCOL-11**  
**6-25x50SFP**

**SCFF-25**  
**4-16x44FFP**

**SCFF-26**  
**6-24x50FFP**



MPN-1  
Setting: 10x, MIL



VPA-MF  
FFP, MIL



**FMC**



**With Rings**



**30mm Tube**



**Shock Proof**



**Nitrogen**



**Reset to Zero**



# Forester

## Feature

- Brilliant, Bright, Better
- Edge-to-Edge Image
- Etched Glass FD7 Reticle
- Center Dot w/ 11 Levels Illumination
- Designed for 30-400 Yards Shooting & Hunting
- Free Lens Cover & 30mm Scope Rings



Magnification	1-5x	2-10x	3-15x	1-5x GenII
Objective Lens Dia.	24mm	40mm	50mm	24mm
Exit Pupil	16-5.2mm	20-4.0mm	16.7-3.3mm	16-5.2mm
F.O.V (@100yds)	73.3-19.9 feet	41.9-10.5 feet	36.2-7.2 feet	73.3-19.9 feet
Eye Relief (mm / inch)	115-95 / 4.5-3.7	100-90 / 3.9-3.5	95-85 / 3.7-3.3	115-95 / 4.5-3.7
Length (mm / inch)	265 / 10.4	340 / 13.4	385 / 15.1	260 / 10.2
Weight (net, g / oz)	415 / 14.6	500 / 17.6	575 / 20.3	425 / 15.0
Tube Dia.	30mm	30mm	30mm	30mm
Elevation Range	60 MOA	60 MOA	60 MOA	60 MOA
Windage Range	60 MOA	60 MOA	60 MOA	60 MOA
Click Value	1/2 MOA	1/4 MOA	1/4 MOA	1/2 MOA
Parallax Adjustment	50 yards	50 yards	100 yards	50 yards
Reticle	VFD-2	VFD-2	VFD-2	VFD-2
Illumination	11 levels R	11 levels R	11 levels R	11 levels R




**SCOC-03  
1-5x24**

**SCOM-02  
2-10x40**

**SCOM-16  
3-15x50**

**SCOC-03II  
1-5x24 GenII**



VFD-2  
Setting: 5x, MOA



**FMC**



**With Rings**



**30mm Tube**



**Shock Proof**



**5x Zoom**



**Reset to Zero**



# Sentinel GenII

## Feature

Stepless Green & Red Illumination

4x Zoom Factor



Resettable Zero MOA Turrets

Min at 10YDS Side Focus

Take Strong Air Rifle Recoil

Free Flip-up Caps, Honeycomb Shade & 30mm Scope Rings

Fully-multi Coated

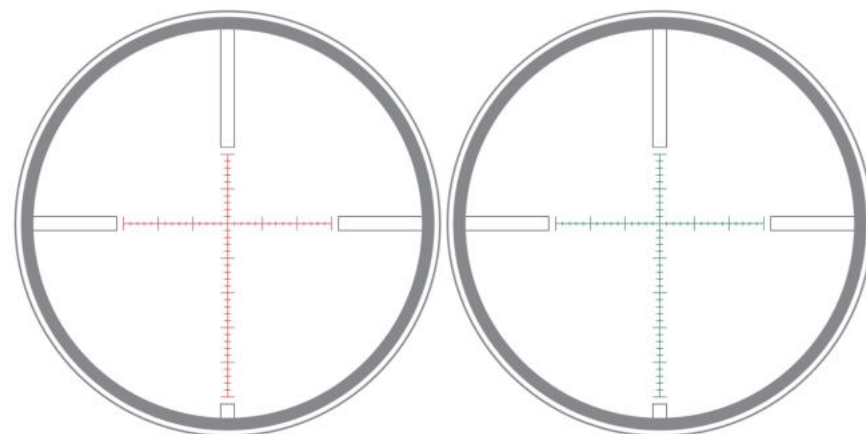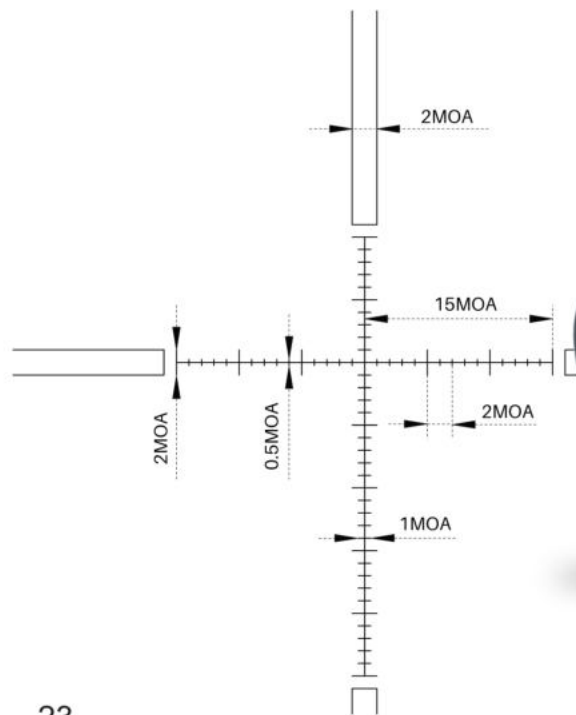

Magnification	4-16x	6-24x	8-32x	10-40x
Objective Lens Dia.	50mm	50mm	50mm	50mm
Exit Pupil	12.5-3.1mm	8.3-2.1mm	6.2-1.5mm	5.0-1.25mm
F.O.V (@100yds)	24.4-7 feet	16.5-4.3 feet	16.5-3.3 feet	3.8-1.1°
Eye Relief (mm / inch)	100-80 / 3.9-3.1	100-80 / 3.9-3.1	100-78 / 3.9-3.1	92-85 / 3.6-3.3
Length (mm / inch)	340 / 13.4	385 / 15.1	405 / 15.9	405 / 15.9
Weight (net, g / oz)	750 / 26.5	755 / 26.6	780 / 27.5	790 / 27.9
Tube Dia.	30mm	30mm	30mm	30mm
Elevation Range	55 MOA	50 MOA	45 MOA	50 MOA
Windage Range	55 MOA	50 MOA	45 MOA	50 MOA
Click Value	1/4 MOA	1/8 MOA	1/8 MOA	1/8 MOA
Parallax Adjustment	12 yds to ∞	15 yds to ∞	10 yds to ∞	10 yds to ∞
Reticle	MPR-3	MPR-3	MPR-3	MPR-3
Illumination	Stepless R & G	Stepless R & G	Stepless R & G	Stepless R & G




**SCOL-13**  
**4-16x50**

**SCOL-14**  
**6-24x50**

**SCOL-05**  
**8-32x50**

**SCOL-07**  
**10-40x50**



MPR-3  
Setting: 16x, MOA (SCOL-13)  
Setting: 20x, MOA (SCOL-05/SCOL-07/SCOL-14)



**FMC**



**With Rings**



**30mm Tube**



**Shock Proof**



**4x Zoom**



**Nitrogen**



# Hugo

## Feature

- 4" Long Eye Relief w/ Wide F.O.V
- Edge-to-Edge Image
- True 4x Zoom Factor 1" Monotube in Rugged Construction
- Center Dot w/ 11 Levels R Plus 1 Level NV (GT Only)
- Resettable Zero 1/4 MOA Turrets
- Free Lens Cover & 1" Scope Rings



Magnification	3-12x	4-16x	6-24x
Objective Lens Dia.	44mm	44mm	50mm
Exit Pupil	14.6-4mm	11-2.7mm	8.3-2mm
F.O.V (@100yds)	31.5-7.9 feet	21.1-5.3 feet	15.8-4 feet
Eye Relief (mm / inch)	105-100 / 4.1-3.9	105-100 / 4.1-3.9	105-100 / 4.1-3.9
Length (mm / inch)	325 / 12.8	340 / 13.4	360 / 14.2
Weight (net, g / oz)	540 / 19	625 / 22	660 / 23.3
Tube Dia.	25.4mm (1")	25.4mm (1")	25.4mm (1")
Elevation Range	60 MOA	50 MOA	40 MOA
Windage Range	60 MOA	50 MOA	40 MOA
Click Value	1/4 MOA	1/4 MOA	1/4 MOA
Parallax Adjustment	10 yds to ∞	10 yds to ∞	10 yds to ∞
Reticle	VOI-10BDC VOW-10BDC(GT)	VOI-10BDC VOW-10BDC(GT)	VOI-10BDC VOW-10BDC(GT)
Illumination	11 levels R(GT) +1 level NV(GT)	11 levels R(GT) +1 level NV(GT)	11 levels R(GT) +1 level NV(GT)



**SCOM-30**  
**3-12x44**


**SCOM-31**  
**3-12x44GT**

**SCOL-29**  
**4-16x44**


**SCOL-30**  
**4-16x44GT**

**SCOL-31**  
**6-24x50**

**SCOL-32**  
**6-24x50GT**



VOI-10BDC  
Setting: 10x, MOA



VOW-10BDC  
Setting: 10x, MOA



FMC



With Rings



1" Tube



Shock Proof



4x Zoom



IPX6 Waterproof



# Matiz

## Feature


- 4" Long Eye Relief w/ Wide F.O.V
- Edge-to-Edge Image
- 3x Zoom Factor 1" Monotube in Rug Construction
- Resettable 1/4 MOA Turrets
- Min at 10YDS Side Focus
- Free Lens Cover & 1" Scope Rings




Magnification	2-7x	3-9x	3-9x	4-12x	6-18x
Objective Lens Dia.	32mm	40mm	50mm	40mm	44mm
Exit Pupil	16-4.5mm	13.3-4.4mm	13.3-4.4mm	11-3.6mm	7.3-2.4mm
F.O.V (@100yds)	8-2.3°	6.3-2.2°	6.3-2.2°	4.5-1.4°	2.5-1.1°
Eye Relief (mm / inch)	108-98 / 4.3-3.9	105-96 / 4.1-3.8	105-96 / 4.1-3.8	108-98 / 4.3-3.9	102-96 / 4-3.8
Length (mm / inch)	290 / 11.4	310 / 12.2	310 / 12.2	350 / 13.8	350 / 13.8
Weight (net, g / oz)	400 / 14.1	420 / 14.8	420 / 14.8	540 / 19	550 / 19.6
Tube Dia.	25.4mm (1")	25.4mm (1")	25.4mm (1")	25.4mm (1")	25.4mm (1")
Elevation Range	60 MOA	60 MOA	60 MOA	60 MOA	50 MOA
Windage Range	60 MOA	60 MOA	60 MOA	60 MOA	50 MOA
Click Value	1/4 MOA	1/4 MOA	1/4 MOA	1/4 MOA	1/4 MOA
Parallax Adjustment	100 yds	100 yds	100 yds	10 yds to ∞	10 yds to ∞
Reticle	Duplex	Duplex	German #4	VOW-10BDC	VOW-10BDC
Illumination	N / A	N / A	11 levels R	N / A	N / A




**SCOM-26** 2-7x32      **SCOM-27** 3-9x40      **SCOM-28** 3-9x50      **SCOM-29** 4-12x40      **SCOL-28** 6-18x44



German #4 MOA



Duplex MOA



VOW-10BDC Setting: 12x, MOA (SCOM-29) Setting: 18x, MOA (SCOL-28)



FMC



With Rings



1" Tube



Shock Proof



3x Zoom



Lens Cover



# Veyron

## Feature

- Ultra Short, Low Light Shooting Design
- 4x Zoom Factor
- Resettable 1/10 MIL Turrets
- Min at 10YDS Side Focus
- Offered in Second & First Focal Plane
- Free Flip-up Caps, Honeycomb Shade & 30mm Scope Rings



Model	Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Reticle	Illumination
SCFF-21	3-12x	44mm	14.6-3.6mm	35.1-8.7 feet	90-85 / 3.5-3.4	245 / 9.7	500 / 17.6	30mm	17.5 MIL	17.5 MIL	1/10 MIL	10 yds to ∞	MPR-4	N / A
SCOM-24	3-12x	44mm	14.6-3.6mm	35.1-8.7 feet	90-85 / 3.5-3.4	245 / 9.7	500 / 17.6	30mm	17.5 MIL	17.5 MIL	1/10 MIL	10 yds to ∞	MPR-4	N / A
SCFF-22	4-16x	44mm	11-2.75mm	26.2-6.55 feet	90-85 / 3.5-3.4	270 / 10.6	570 / 20	30mm	17.5 MIL	17.5 MIL	1/10 MIL	10 yds to ∞	MPR-4	N / A
SCFF-23	6-24x	44mm	17.5-4.3mm	8.3-2.1 feet	90-85 / 3.5-3.4	270 / 10.6	570 / 20	30mm	14.5 MIL	14.5 MIL	1/10 MIL	10 yds to ∞	MPR-4	N / A



FMC



With Rings



30mm Tube



Shock Proof



4x Zoom



IPX6 Waterproof

# Tourex

## Feature

- Etched Glass MOA Reticle
- Tactical 1/4 MOA Turrets w/ Zero Stop
- First Focal Plane Reticle w/ 6 Levels Illumination
- Min at 10YDS Side Focus
- Designed for Mid-Long Range Shooting
- Free Flip-up Caps, Honeycomb Shade & 30mm Scope Rings



Model	Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Reticle	Illumination
SCFF-24	4-16x	44mm	11.0-2.75mm	24.6-6.3 feet	105-100 / 4.1-3.9	355 / 14.0	665 / 23.5	30mm	60 MOA	60 MOA	1/4 MOA	10 yds to ∞	VML-1	6 levels R
SCFF-19	6-24x	50mm	8.3-2.1mm	18.3-4.6 feet	105-100 / 4.1-3.9	365 / 14.3	745 / 26.3	30mm	50 MOA	50 MOA	1/4 MOA	10 yds to ∞	VML-1	6 levels R



FMC



With Rings



30mm Tube



Shock Proof



4x Zoom



IPX6 Waterproof

# SVD Dragunov

## Feature

- Classic Design
- Fully-multi Coated
- First Focal Plane Reticle w/ Red Illumination
- Bulid-in Sunshade
- Fit AKs & SVD
- Free Eye Cover



**SCRD-31**  
1x28 Red Dot Sight



Model	Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Elevation Range	Parallax Adjustment	Reticle	Illumination
SCFF-16	3-9x	24mm	8.0-2.5mm	34.1-11.4 feet	80 / 3.2	312 / 12.3	615 / 21.8	0-1500 yards	100 yds	SVD	R
SCFF-15	4x	24mm	6mm	31 feet	90 / 3.5	260 / 10.2	615 / 21.8	0-1500 yards	100 yds	SVD	R
SCFF-18	6x	36mm	6mm	23 feet	90 / 3.5	357 / 14.0	615 / 21.8	0-1500 yards	100 yds	SVD	R



FMC



E & W



Nitrogen



Shock Proof



R Illumination



Reset to Zero



# Grizzly

## Feature

- 4x Zoom Factor
- 4A Center Dot Reticle w/ 11 Levels Illumination
- 1/4 MOA Finger E & W Adjustment
- 56mm Objective Lens Provide Bright, Brilliant Views & Clear Images
- Designed for 30 to 400 Yards Hunting
- Free Lens Cover & 30mm Scope Rings



Model	Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Reticle	Illumination
SCOM-01	1.5-6x	56mm	37.3-9.3mm	66.5-16.6 feet	100-94 / 3.9-3.7	310 / 12.2	700 / 24.7	30mm	60 MOA	60 MOA	1/4 MOA	100 yds	German #4	11 levels R
SCOM-21	2.5-10x	56mm	122.4-5.6mm	35.6-8.9 feet	100-94 / 3.9-3.7	310 / 12.2	600 / 21.2	30mm	60 MOA	60 MOA	1/4 MOA	100 yds	German #4	11 levels R
SCOM-09	3-12x	56mm	18.7-4.7mm	35.6-8.9 feet	100-94 / 3.9-3.7	310 / 12.2	695 / 24.5	30mm	60 MOA	60 MOA	1/4 MOA	100 yds	German #4	11 levels R



FMC



With Rings



30mm Tube



Shock Proof



4x Zoom



Nitrogen





# Calypos

**Edge-to-Edge Image, .223 BDC Reticle**  
**Prism Scope, Fast Target Acquisition, Compact CQB**



**SCOC-20**  
**3x32**



**SCOC-25**  
**1x30**

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
3x	32mm	10-8mm	>6.5°	76 / 3.0	140 / 5.5	435 / 15.4	Prism	90 MOA	90 MOA	1/2 MOA	11 levels R
1x	30mm	16-14mm	>14°	98-94 / 3.9-3.7	103 / 4.1	335 / 11.8	Prism	120 MOA	120 MOA	1/2 MOA	11 levels R



Shock Proof



Open Shooting



IPX6 Waterproof




Tactical Style




Tactical Style



FMC



VEP-CDB



VEP-ROD







# Second Focal Plane



**SCOC 22**  
**Wrangler 1x24**  
**Parallax: 100 yds**

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
1x	24mm	24mm	95 feet	101 / 4.0	228 / 9	370 / 13.1	30mm	40 MOA	40 MOA	1/2 MOA	11 levels <b>R</b>




**Duplex-F**



**SCOC-19**  
**Arbiter 1-4x24**  
**Parallax: 100 yds**

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
1-4x	24mm	16-5.9mm	105.8-26.2 feet	104-89 / 4.1-3.5	280 / 11	500 / 17.6	30mm	90 MOA	90 MOA	1/2 MOA	11 levels <b>R</b>




**DND**



**SCOC-13II**  
**Grimlock 1-6x24 GenII**  
**Parallax: 100 yds**

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
1-6x	24mm	10.5-3.9mm	116.6-19.2 feet	96-95 / 3.8-3.7	265 / 10.4	500 / 17.6	30mm	60 MOA	60 MOA	1/2 MOA	6 levels <b>R</b>




**VTC-3**



**SCOC-21**  
**Thanator 1-8x24**  
**Parallax: 100 yds**

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
1-8x	24mm	16.6-3.2mm	104-13 feet	111-91 / 4.3-3.5	260 / 10.2	500 / 17.6	30mm	12 MIL	12 MIL	1/10 MIL	11 levels <b>R</b>




**VTC-2**



**SCOC-26**  
**Zalam 1-10x24**  
**Parallax: 100 yds**

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
1-10x	24mm	14-2.4mm	106-10.6 feet	140-94 / 5.5-3.8	260 / 10.2	445 / 15.7	30mm	28 MIL	28 MIL	1/10 MIL	10 levels <b>R</b>




**VET-10BDC**

# Second Focal Plane



**SCOC-02**  
**Mustang 1.5-4x30**  
**Parallax: 100 yds**

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
1.5-4x	30mm	16-6mm	11.5-4°	95-90 / 3.7-3.5	255 / 10.0	500 / 17.6	30mm	120 MOA	120 MOA	1/2 MOA	3 levels R G B




**Chevron**



**SCOC-05**  
**Swift 1.25-4.5x26**  
**Parallax: 100 yds**

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
1.25-4.5x	26mm	7.6-6.5mm	18-5.4°	135-96 / 5.3-3.8	280 / 11.0	450 / 15.9	30mm	80 MOA	80 MOA	1/4 MOA	5 levels R G




**R12**



**SCOL-06II**  
**Everest 3-18x50 GenII**  
**Parallax: 10 yds - ∞**

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
3-18x	50mm	10-2.8mm	38.2-6.2 feet	95-92 / 3.7-3.6	355 / 14.0	740 / 26.1	30mm	60 MOA	60 MOA	1/4 MOA	N/A



**MPTR-2**



**SCOC-06**  
**Streak 4x22**  
**Parallax: 100 yds**

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
4x	22mm	5.5mm	4.6°	75 / 2.9	180 / 7.1	360 / 12.7	34mm	60 MOA	60 MOA	1/4 MOA	N/A




**MPC-1**

# 1" Second Focal Plane



**SCOC-12**  
**Cerato 3-9x32**  
**Parallax: 3 yds - ∞**

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
3-9x	32mm	10.6-3.6mm	37-12.5 feet	102-76 / 4.0-3.0	208 / 8.2	380 / 13.4	25.4mm	120 MOA	120 MOA	1/4 MOA	Stepless R & G




**Mil-dot**



**SCOC-17**  
**Reaver 2-7x32**  
**Parallax: 100 yds**

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
2-7x	32mm	16-4.6mm	14-4.6 feet	350-270 / 13.8-10.5	265 / 10.4	255 / 9.0	25.4mm	70 MOA	70 MOA	1/4 MOA	N / A




**Duplex**



**SCOM-22**  
**Outback 3-12x40**  
**Parallax: 10 yds - ∞**

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
3-12x	40mm	13.3-3.3mm	35.0-11.6 feet	100 / 4	332 / 13.0	510 / 18.0	25.4mm	60 MOA	60 MOA	1/4 MOA	N / A



**VMD-2**



**SCOM-05**  
**Nova 3.5-10x42**  
**Parallax: 5 yds - ∞**

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
3.5-10x	42mm	12-4.2mm	31.4-11.5 feet	80-75 / 3.1-3	320 / 12.6	570 / 20.1	25.4mm	50 MOA	50 MOA	1/4 MOA	N / A




**MPC-1**



**SCOM-08**  
**Nova 5-15x42 AO**  
**Parallax: 10 yds - ∞**

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
5-15x	42mm	8.4-2.8mm	26.2-9.4 feet	80-75 / 3.1-3	350 / 13.8	600 / 21.2	25.4mm	50 MOA	50 MOA	1/4 MOA	N / A



**MPC-1**




# 35mm Second Focal Plane



**SCOL-04**  
Atlas 5-30x56  
Parallax: 10 yds - ∞

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V. (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) [g / oz]	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
5-30x	56mm	11.2-1.9mm	23.6-3.8 feet	101-89 / 4.0-3.5	375 / 14.8	1000 / 35.3	<b>35mm</b>	<b>85 MOA</b>	<b>85 MOA</b>	1/8 MOA	11 levels <b>R</b>




VHL



**SCOL-08**  
Minotaur 10-50x60  
Parallax: 30 yds - ∞

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V. (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) [g / oz]	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
10-50x	60mm	6-1.2mm	9.6-2.0 feet	108-99 / 4.3-3.9	480 / 18.9	1150 / 40.5	<b>35mm</b>	<b>30 MOA</b>	<b>30 MOA</b>	1/8 MOA	11 levels <b>R</b>




Thin-dot



**SCOL-18**  
Minotaur 12-60x60  
Parallax: 30 yds - ∞

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V. (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) [g / oz]	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
12-60x	60mm	5-1mm	8.4-1.7 feet	108-99 / 4.3-3.9	498 / 19.6	1170 / 41.0	<b>35mm</b>	<b>30 MOA</b>	<b>30 MOA</b>	1/8 MOA	11 levels <b>R</b>




Thin-dot



**SCOL-19**  
Reiter 3.5-25x56  
Parallax: 20 yds - ∞

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V. (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) [g / oz]	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
3.5-25x	56mm	8-2.2mm	31.3-4.3 feet	120-89 / 4.7-3.5	350 / 13.8	995 / 35.1	<b>35mm</b>	<b>23 MIL</b>	<b>14 MIL</b>	1/10 MIL	11 levels <b>R</b>




VPA-3



**SCOL-25**  
Zalam 4-48x65  
Parallax: 20 yds - ∞

Magnification	Objective Lens Dia.	Exit Pupil	F.O.V. (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) [g / oz]	Tube Dia.	Elevation Range	Windage Range	Click Value	Illumination
4-48x	65mm	12-1.35mm	26.7-2.3 feet	104-93 / 4.1-3.66	438 / 17.6	1260 / 44.5	<b>35mm</b>	<b>60 MOA</b>	<b>60 MOA</b>	1/8 MOA	10 levels <b>R</b>



VET-L338



# RED DOT SIGHTS









# Frenzy

**Pistols Application, 8 Levels + 2 NV Dot**

**20,000H Runtime, 3 MOA Micro Reflex Sight**



**SCRD-35**  
**1x20x28**

Model	Magnification	Objective Lens Dia.	Length (mm / inch)	Weight (net) (g / oz)	Elevation Range	Windage Range	Click Value	Dot Size	Illumination	Battery Type
SCRD-19II	N/A	24x17mm	46 / 1.8	56 / 2.0	45 MOA	45 MOA	1 MOA	3 MOA	8 levels R & 2 levels NV	CR2032
SCRD-35	N/A	20x28mm	46 / 1.8	56 / 2.0	45 MOA	45 MOA	1 MOA	3 MOA	8 levels R & 2 levels NV	CR2032
SCRD-36	N/A	26mm	46 / 1.8	56 / 2.0	45 MOA	45 MOA	1 MOA	3 MOA	8 levels R & 2 levels NV	CR2032
SCRD-37	N/A	26mm	46 / 1.8	56 / 2.0	45 MOA	45 MOA	1 MOA	3 MOA	8 levels R & 2 levels NV	CR2032



41 Shock Proof



Open Shooting



IPX6 Waterproof



Tactical Style



**SCRD-19II**



**SCRD-36**



**SCRD-37**







# Centurion

**AR Platform, 3 MOA Dot, 8 Levels + 2 NV**

**20,000H Runtime, Short Focus & Wide Angle**



**SCRD-34**  
**1x30**

Model	Magnification	Objective Lens Dia.	Length (mm / inch)	Weight (net) (g / oz)	Elevation Range	Windage Range	Click Value	Dot Size	Illumination	Battery Type
SCRD-33	N/A	20mm	69 / 2.7	175 / 6.2	60 MOA	60 MOA	1 MOA	3 MOA	7 levels R & 1 level NV	AAA
SCRD-34	N/A	30mm	67 / 2.6	170 / 6.0	60 MOA	60 MOA	1 MOA	3 MOA	7 levels R & 1 level NV	CR2032



Shock Proof



Open Shooting



IPX6 Waterproof



Tactical Style



**SCRD-33**  
**40,000 hours**





# Maverick

3 MOA Dot Size, 10 Levels + 1 NV

Tactics, Hunting & Sporting



**SCRD-12II**  
**1x22 GenII**

Model	Magnification	Objective Lens Dia.	Length (mm / inch)	Weight (net) (g / oz)	Elevation Range	Windage Range	Click Value	Dot Size	Illumination	Battery Type
SCRD-12	N/A	22mm	68 / 2.7	185 / 6.5	80 MOA	80 MOA	1 MOA	3 MOA	11 levels R	CR2032
SCRD-12II	N/A	22mm	75 / 3.0	188 / 6.6	100 MOA	100 MOA	1 MOA	3 MOA	11 levels R	CR2032
SCRD-38	N/A	22mm	75 / 3.0	186 / 6.6	60 MOA	60 MOA	1 MOA	3 MOA	11 levels R	CR2032



Shock Proof



Open Shooting



IPX6 Waterproof



Tactical Style



**SCRD-12**



**SCRD-38**  
**Rubber Cover**







# Red Dot Sight Magnifier

**Crystal Sharp Clear**

**Fit Various Red Dot Scopes**

**3x Magnifier**

**4x Magnifier**

**5x Magnifier**

**Optional Flip Side Mount**



**SCOT-29**  
**4x Magnifier**

Model	Magnification	Objective Lens Dia.	F.O.V (@100yds)	Length (mm / inch)	Weight (net) (g / oz)	Eye Relief (mm / inch)	Exit Pupil
SCOT-07	3.0x	26mm	49 feet	108 / 4.2	230 / 8.1	60 / 2.4	7mm
SCOT-29	4.0x	26mm	26 feet	115 / 4.5	230 / 8.1	75 / 3.0	7mm
SCOT-08	5.0x	26mm	20.3 feet	120 / 4.7	230 / 8.1	70 / 2.8	6.5mm



Shock Proof



Open Shooting



IPX6 Waterproof



Tactical Style



**SCOT-07**



**SCOT-08**



**SCSR-08**



**SCTM-17**



# Open Style Red Dot Sight



**SCRD-04**  
**8 Reticles**

- Exclusive 8 Reticles
- US Design in High End Quality
- 5 Levels R & G Illumination
- Ultra Wide F.O.V
- W/ QD Picatinny Mount



**SCRD-06**  
**Sable 1x23x34**

- 4 Kinds of Reticles
- Digital Switch Control
- 6 Levels R & G Illumination
- W/ QD Picatinny Mount



**SCRD-18B**  
**IMP Dovetail**

- 4 Kinds of Reticles
- W/ Reticle Lock System
- 7 Levels R Illumination
- W/ Dovetail Mount



**SCRD-18C**  
**IMP Weaver**

- 4 Kinds of Reticles
- W/ Reticle Lock System
- 7 Levels R Illumination
- W/ Weaver Mount



**SCRD-17**  
**Wraith 1x22x23**

- 3 MOA Dot Dize
- Motion Sense Function
- Light & Compact
- 6 Levels R Illumination
- W/ Weaver Mount



**SCRD-23**  
**Ratchet 1x23x34**

- 4 Kinds of Reticles
- Light & Compact
- 5 Levels R & G Illumination
- W/ QD Weaver Mount



**SCRD-29**  
**Spirit 1x29**

- 3MOA Dot Size
- Super-light & Ultra-compact
- 6 Levels R Illumination
- Auto Light Sense & On / Off Switch
- W/ Picatinny Mount



**SCRD-10A**  
**Sphinx 1x22**

- Excellent for Rapid-shooting
- Model A for Auto Light Sense
- Model B for Green Dot
- Model C for Dovetail Mount



Model	SCRD-04	SCRD-06	SCRD-18B	SCRD-18C	SCRD-17	SCRD-23	SCRD-29	SCRD-10A
Magnification	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Objective Lens Dia.	39x27mm	25x34mm	23x34mm	23x34mm	22x23mm	23x34mm	25mm	25x18mm
Length (mm / inch)	110 / 4.3	82 / 3.2	80 / 3.1	80 / 3.1	66 / 2.6	82 / 3.2	48 / 1.9	48 / 1.9
Weight (net, g / oz)	260 / 9.2	140 / 4.9	110 / 3.9	110 / 3.9	115 / 4.0	140 / 4.9	60 / 2.1	55 / 2.0
Elevation Range	60 MOA	60 MOA	40 MOA	40 MOA	40 MOA	60 MOA	60 MOA	30 MOA
Windage Range	60 MOA	60 MOA	40 MOA	40 MOA	40 MOA	60 MOA	60 MOA	30 MOA
Click Value	1 MOA	1 MOA	1MOA	1MOA	1MOA	1 MOA	1MOA	1MOA
Dot Size	8 patterns	5 MOA	4 patterns	4 patterns	3 MOA	4 patterns	3 MOA	3 MOA
Illumination	5 levels R & G	6 levels R & G	7 levels R	7 levels R	6 levels R	5 levels R & G	6 levels R	Auto Brightness
Battery Type	LIR2032 3.6V	CR2032	CR2032	CR2032	CR2032	LR754	CR2032	CR2032



# Tube Style Red Dot Sight



**SCRD-26**  
**Nautilus 1x30**

- Digital Switch
- W/ Flip-up Caps & Detachable Riser Bar
- 11 Levels R Illumination
- Auto Light Sense & On / Off Switch
- W/ Picatinny Mount



**SCRD-26II**  
**Nautilus 1x30 GenII**

- Digital Switch
- W/ Flip-up Caps & Detachable Riser Bar
- 11 Levels R Illumination
- Auto Light Sense & On / Off Switch
- W/ QD Picatinny Mount



**SCRD-30**  
**Harpy 1x22**

- 3MOA Dot Size
- 20,000h Run-time
- 7 Levels R Plus 1 Level NV
- For Close-in Work & General Shooting
- W/ QD Riser & Low Picatinny Mount



**SCRD-32**  
**Scrapper 1x25**

- 2MOA Dot Size
- Fit 1.41" Absolute Co-witness
- 8 Levels R Plus 2 Levels NV
- 4h Shut-down
- W/ Riser Picatinny Mount



**SCRD-02**  
**Harpoon 1x30**

- 3/4/5/6MOA Dot Size
- W/ Flip-up Caps
- 5 Levels R & G Illumination
- W/ Weaver Mount Ring



**SCRD-03**  
**Condor 2x42**

- 5MOA Dot Size
- 2 Times Magnification
- 5 Levels R & G Illumination
- W/ Picatinny Mount



**SCRD-05**  
**Stinger 1x28**

- 5MOA Dot Size
- W/ Flip-up Caps
- 5 Levels R & G Illumination
- W/ Cantilever Weaver Mount



**SCRD-11**  
**Cactus 1x35 Dovetail**

- 3MOA Dot Size
- W/ Lens Caps
- 7 Levels R Illumination
- W/ Dovetail Mount



<b>Model</b>	SCRD-26	SCRD-26II	SCRD-30	SCRD-32	SCRD-02	SCRD-03	SCRD-05	SCRD-11
<b>Magnification</b>	N/A	N/A	N/A	N/A	N/A	2.0x	N/A	N/A
<b>Objective Lens Dia.</b>	30mm	30mm	22mm	25mm	30mm	42mm	28mm	35mm
<b>Length (mm / inch)</b>	110 / 4.3	110 / 4.3	67 / 2.6	70 / 2.7	128 / 5.0	163 / 6.4	125 / 4.9	110 / 4.3
<b>Weight (net, g / oz)</b>	270 / 9.5	270 / 9.5	150 / 5.3	170 / 6.0	225 / 7.9	430 / 15.2	200 / 7.1	160 / 5.6
<b>Elevation Range</b>	60 MOA	60 MOA	80 MOA	45 MOA	60 MOA	70 MOA	80 MOA	80 MOA
<b>Windage Range</b>	60 MOA	60 MOA	80 MOA	45 MOA	60 MOA	70 MOA	80 MOA	80 MOA
<b>Click Value</b>	1MOA	1MOA	1 MOA	1 MOA	1MOA	1 MOA	1MOA	1MOA
<b>Dot Size</b>	3 MOA	3 MOA	3 MOA	2 MOA	3,4,5,6 MOA	5 MOA	6 MOA	5 MOA
<b>Illumination</b>	11 levels R	11 levels R	7 levels R & 1 level NV	6 levels R & 2 levels NV	5 levels R & G	5 levels R & G	5 levels R & G	7 levels R
<b>Battery Type</b>	AAA	AAA	CR2032	CR2032	CR2032	CR2032	CR2032	CR2032




**2 MOA**



**3 MOA**



**4 MOA**



**5 MOA**



**6 MOA**





Map, Smoke, Compass &

# Binocular

Those are all my needs for hunting

Model		Lens Coating	Lens Coating	Size	Weight	F.O.V (Angular)	F.O.V (Linear)	Exit Pupil
Sentinel	SCBO-11 8x25	Bak4	Fully-multi coated	107x106x34mm	285g / 10oz	6.8°	356ft / 119m@1000yds / m	3.1mm
Forester	SCBO-01 8x42			147x53x126mm	620g / 21.9oz	6.5°	338ft / 113m@1000yds / m	5.1mm
	SCBO-02 10x42			146x54x128mm	685g / 24.2oz	5.8°	305ft / 102m@1000yds / m	4.1mm
Paragon	SCBO-03 8x42			146x54x128mm	675g / 23.8oz	6.6°	347ft / 116m@1000yds / m	5.1mm
	SCBO-04 10x42			6.3°	331ft / 110m@1000yds / m	4.1mm		



# RANGEFINDER



Model	Magnification	Objective Lens Dia.	Measuring Range(m)	Weight (net) (g / oz)	Size (mm / inch)	Function Modes	Battery Type
SCRF-01A	6x	25mm	4-600	165 / 5.8	75x40x110 3.0x1.6x4.3	Rain High Reflect Object Long Range	CR2
SCRF-01B	6x	25mm	4-600	165 / 5.8	75x40x110 3.0x1.6x4.3	Beeline Angle Height(For golf purpose)	CR2
SCRF-02	8x	30mm	12-1200	275 / 9.7	82x45x123 3.2x1.8x4.8	Rain High Reflect Object Long Range	CR123



# LIBERTY Porro-prism Design



**20X**



**60X**

Model	SCSS-01
Magnification	20-60x
Objective Lens Dia.	60mm
Prism Type	Porro / BAK-4
Focus Type	Prismatic
Exit Pupil	3.0-1.0mm
F.O.V (@1000yds)	100-50feet
Resolution Center (Axis)	3.99 SOA (60X Center)
Eye Relief (mm / inch)	16.5-13 / 0.65-0.51
Length (mm / inch)	350 / 13.8
Weight (net, g / oz)	730 / 25.8







# VECTOR DEFENSE

Proudly field live tested and approved by our customers all over the world. CNC precision-machined from aircraft aluminum bringing superior accuracy to your guns and firearms.

Vector Defense covers quality handguards, rail mounts, bipods, stock tube kits and more offering you a stable support for hunting, shooting and tactics.

# Slim KeyMod Handguard

## AR15 Rail System



SCRAAM-30



SCRAAM-29



SCRAAM-31



SCRAAM-32



SCRAAM-41

EX-EXTENDED LENGTH



EXTENDED LENGTH



RIFLE LENGTH



MID LENGTH



CARBINE LENGTH



Free Float Style

KeyMod Compatible

Black Matte Finish

Precision CNC Machined

All KeyMod Cutout

Fit Most Model .223 AR/M



# Slim Handguard

## AR15 Rail System



SCRAAM-35

SCRAAM-36

SCRAAM-37

SCRAAM-38

SCRAAM-42

SCRAAM-55

SCRAAM-56

SCRAAM-47

EX-EXTENDED LENGTH




17"

320g / 11.3oz

Free Float Style

EXTENDED LENGTH



15"

292g / 10.3oz

Additional Rail Sections

RIFLE LENGTH




12"

250g / 8.8oz

M-Model Comoatible

MID LENGTH



10"

223g / 7.9oz

BlackMatte Finish

CARBINE LENGTH



7"

183g / 6.4oz

Fit Most Model .223 / AR/M

# Carbon Fiber Polymer Handguard

## AR15 Rail System



SCRAAM-46



SCRAAM-45




SCRAAM-44



SCRAAM-43

EXTENDED LENGTH



15"

230g / 8.1oz

RIFLE LENGTH



12"

201g / 7.1oz

MID LENGTH



10"

175g / 6.2oz

CARBINE LENGTH



7"

145g / 5.1oz

Free Float Style

M-Model Compatible

Unique Carbon Fiber Finish

Ultra Slim & Light

Additional Rail Sections

Fit Most Model .223 AR/M



# Carbon Fiber Handguard

## AR15 Rail System



SCRAAM-28



SCRAAM-27



SCRAAM-26



SCRAAM-25

EXTENDED LENGTH



360g / 12.7oz

RIFLE LENGTH



325g / 11.5oz

MID LENGTH



290g / 10.3oz

CARBINE LENGTH



250g / 8.8oz

Additional Rail Sections

Made of Carbon Fiber

Super Light Weight in Precision

Fit Most Model .223 AR/M

# AR10 Rail System



SCRAAM-50



SCRAAM-49



SCRAAM-48

EX-EXTENDED LENGTH



17"

EXTENDED LENGTH



15"

RIFLE LENGTH



12"

Free Float Style

Additional Rail Sections

Black Matte Finish

Precision CNC Machined

Fit Most Model .308 AR/M



# AK / H&K Rail System



**SCRA-15A**  
AK 47/74 Handguard  
Quad Rail



**SCRA-15B**  
AK Pistol Handguard  
Quad Rail



**SCRA-17**  
Tri-Rail Barrel Mount



**SCRA-20**  
Receiver Tri-Rails  
Top Mount Cover



**SCRA-21A**  
Side Picatinny Rail



**SCRA-21B**  
Side Picatinny Rail QD



**SCRA-33**  
Side Dovetail Plate



**SCRHK-01**  
G36 Side  
6" Picatinny Rail



**SCRHK-02**  
G36 Side  
4" Picatinny Rail



**SCRHK-03**  
MP5 Double Rails Claw



**SCRHK-08**  
G3 HK91 Tri-Rails  
Handguard



**SCRHK-09**  
MP5/G3 Picatinny  
Low Rail Mount Base

# Bipod



**SCBPB-01**  
6-9" Sling Stud



**SCBPB-02**  
9-13.5" Sling Stud



**SCBPW-01**  
6.5-7.0" Universal



**SCBPW-02**  
8.8-10.6" Universal



**SCBPW-03**  
6-7.5" Style



**SCBPS-04**  
6-9" Swivel Pivot



**SCBPS-05**  
9-13.5" Swivel Pivot



**SCBPS-05**  
9-13.5" Swivel Pivot



# Stock Assembly



# Tube Kit & Accessories



**SCSB-01**  
Standard 3.0oz Buffer



**SCSB-02 / 03 / 04**  
H1 3.8oz Buffer  
H2 4.5oz Buffer  
H3 5.4oz Buffer



**SCSB-05**  
308 3.8oz Buffer



**SCSB-06**  
Rifle 5.0oz Buffer



**SCSB-07**  
Gen2 H2 4.05oz Buffer



**SCOT-20-1**  
Rubber Butt Pad



**SCOT-20-03**  
Folding Adapter



**SCSK-MN**  
Mosin-Nagant Butt Pad



**SCOT-20-08 / 14**  
Mil-spec Tube  
Commercial Tube



**SCOT-20-11 / 12**  
Spring



**SCOT-20-04**  
Single Loop  
End Plate



**SCOT-20-05**  
Double Loops  
End Plate



**SCOT-20-06**  
Universal Dual Loop  
End Plate



**SCOT-20-07**  
Receiver End Plate



**SCOT-20-09**  
Castle Nut



# Other Picatinny Rail



**SCRA-03**  
Picatinny Riser Rail Long



**SCRA-12**  
Tri-rail Picatinny  
Riser Mount



**SCRA-34**  
45° Offset  
Picatinny Rail



**SCRA-51**  
Dual 45° Offset  
Picatinny Rail



**SCRA-57**  
Ultra Offset  
Picatinny Rail Mount



**SCQD-01**  
Bipod Adapter /  
Picatinny Riser



**SCQD-02**  
Compact Riser



**SCQD-05**  
Compact Angle  
Double Rail



**SCQD-06**  
Angle Double Rail



**SCRA-58**  
0.5" Picatinny  
Riser Mount



**SCRA-59**  
0.83" Picatinny  
Riser Mount



**SCRA-60**  
1" Picatinny  
Riser Mount

# Other Universal



**SCRA-07A / B**  
8" Steel Flat  
Picatinny Rail Even / Curved



**SCRA-38**  
Remington870  
Optics Mount



**SCRA-47**  
Galil Golani Handguard



**SCRA-61**  
Mosin-Nagant  
Steel Side Mount



**SCRA-62**  
Remington700  
Steel Rail Long



**SCRA-63**  
Remington700  
Steel Rail 20MOA Long



**SCRA-64**  
Remington700  
Steel Rail Short



**SCRA-65**  
Remington700  
Steel Rail 20MOA Short



**SCRA-66**  
Lee Enfield  
NO.4 Steel Mount



**SCRA-69**  
Remington700  
Steel Rail Base



**SCOT-49A 0.750" AR15 End Cap**  
**SCOT-49B 0.936" AR15 End Cap**  
**SCOT-56 0.936" AR10 End Cap**



**SCOT-16**  
Carry Handle



# Air-gun & Pistol Mounts



Pistol Sight Mount Plate


Model	SCRDM-01	SCRDM-02	SCRDM-03	SCRDM-04	SCRDM-05	SCRDM-06	SCRDM-07
Fit On	GLOCK	M1911	SIG P226	BERETTA 92	Springfield XD	S&W M&P	HK USP



SCDT-03  
Dovetail to Weaver  
Adapter



SCDT-04  
Weaver to Dovetail  
Adapter



SCIS-05  
LA Fiber Sights  
Combo for Pistol



SCRA-06A  
Dovetail to Weaver  
Mount Rail



SCRA-06B  
Compact Dovetail to  
Weaver Rail



SCIS-06  
SA Fiber Sights  
Combo for Pistol



SCIS-07  
CO Fiber Sights  
Combo for Pistol



SCRA-08  
Dovetail Riser Mount



SCRA-31  
Dovetail to Picatinny  
Extended Rail



SCRA-67  
Red Dot Sight  
Riser Mount

# Handguard Accessories



**SCKMA-01**  
Sling Loop Mount



**SCKMA-02**  
Rail Cover



**SCKMA-03**  
Offset Picatinny  
Mount Rail



**SCKMA-04**  
Low Profile Grip



**SCKMA-05**  
Flashlight Laser  
1" Mount



**SCKRS**  
KeyMod Rail  
Screws Kit



**SCMLS**  
M-Model Rail  
Screws Kit



**SCRAAM-22/23/24**  
2" / 4" / 5"  
KeyMod Rail Section



**SCRAAM-52/53/54**  
2" / 4" / 5"  
M-Model Rail Section



# Laser & Light Combo



**SCRL-05**  
Doublecross **Laser**



**SCGL-08**  
Doublecross **Laser**



**SCFX-06**  
Cobra **Laser**



**SCFL-09**  
Cyclops Grip w/ **Laser**

Model	Output / Brightness	Laser Power	Wavelength	Flashlight Bulb	Weight (net, g / oz)	Function Mode	Run time	Battery Type
SCRL-05	180-200 lumens	3-5mW	650nm	Cree Q5	85 / 3.0	Light: strong weak & strobe Laser: normal & strobe	Laser > 7 hours Light > 3 hours Combo > 1.5 hours	CR123
SCGL-08	180-200 lumens	3-5mW	532nm	Cree Q5	90 / 3.2	Light: strong weak & strobe Laser: normal & strobe	Laser > 7 hours Light > 3 hours Combo > 1.5 hours	CR123
SCFX-06	450-500 lumens	<5mW	650nm	Cree Q5	565 / 20	4 levels for 4 modes	> 3 hours	16340 3.0V
SCFL-09	180-200 lumens	<5mW	650nm	Cree Q5	340 / 12	1 level	2.5-3 hours	16340 3.0V

# BORESIGHTER

CONVENIENT | ACCURATE | BRASS | **AND MORE**





# Red & Green Laser



**SCRL-06**  
Inferno Super Thin Laser



**SCGL-01**  
Starscream Laser



**SCGL-04**  
Viperwolf IR Laser



**SCGL-05**  
Blitz Mini Laser



**SCGL-07**  
Magnus Laser



**SCGL-09**  
Skyray Laser

Model	Laser Power	Wavelength	Weight (net, g / oz)	Run Time	Working Temp	Battery Type
SCGL-06	<5mw	650nM	30 / 1.1	2-3 hours	-10° to 45°	AG3
SCGL-01	<5mw	532nM	135 / 4.8	>3 hours	-10° to 45°	CR123
SCGL-04	4.5mw	Laser: 532nM IR Laser: 850nM	185 / 7.4	>2 hours	-10° to 40°	CR2
SCGL-05	3-5mw	532nM	32 / 1.2	>3 hours	-5° to 40°	1/3N Lithium
SCGL-07	<5mw	532nM	233 / 8.2	>8 hours	-5° to 40°	CR123 / 16340
SCGL-09	1-2mW	520nM	42 / 1.5	>3 hours	-5° to 40°	CR3N

# Tactical Flashlight



**SCFL-02**  
Nightbeat Q2 LED



**SCFL-04**  
Longbwmn R2 LED



**SCFL-06**  
Meteor Pistol LED



**SCFL-07**  
Bolide Q5 LED



**SCFL-08**  
Cyclops Grip

Model	Laser Power	Wavelength	Weight (net, g / oz)	Run Time	Working Temp	Battery Type
SCFL-02	145-185 lumens	Cree Q2	1 level	120 / 4.2	3 hours	18650 3.7V
SCFL-04	380-440 lumens	Cree Q2	1 level	260 / 9.2	4 hours	18650
SCFL-06	180-200 lumens	Cree Q5	1 level	53 / 2.1	3 hours	CR123
SCFL-07	280-320 lumens	Cree Q5	1 level	230 / 8.1	3 hours	18650
SCFL-08	180-200 lumens	Cree Q5	1 level	320 / 11.3	3 hours	CR123



# ACD Leveling Mount

## Little Things You Will Use a Lot



**SCACD-01 / 02**  
30 / 35mm Universal



**SCACD-03 / 04**  
30mm / 25.4mm Offset  
Bubble



**SCACD-05 / 06**  
30mm / 25.4mm Offset  
Bubble w/ Compass



**SCACD-10**  
Universal Flat



**SCACD-15**  
34mm Offset  
Bubble



**SCACD-12**  
40mm Offset  
Bubble



**SCACD-07**  
30mm  
w/ Picatinny Rail



**SCACD-08**  
30mm One Piece  
Extra Light



**SCACD-09**  
30mm One Piece  
Extra Long



**SCACD-11**  
30mm Angle  
Indicating



**SCACD-14**  
30mm One Piece  
Angle Indicating



**SCACD-16**  
30mm 3/8"  
Dovetail

# X-ACCU Scope Mount & Ring

## Precision & Heavy Duty



SCTM-33

SCTM-34


SCTM-35



SCTM-30

SCTM-31

SCTM-32

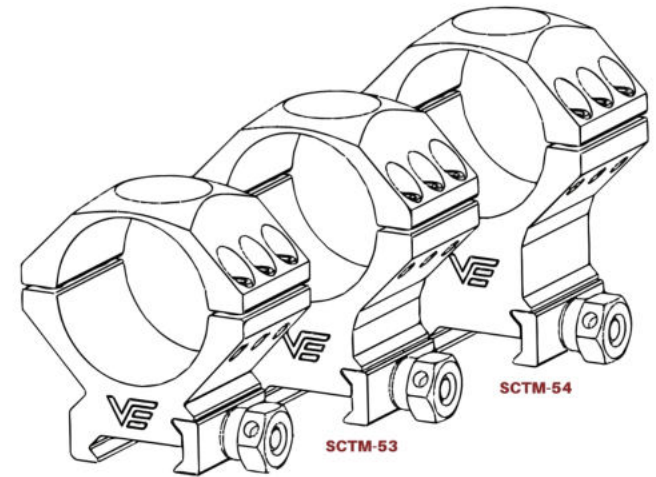

SCTM-52

SCTM-53

SCTM-54

Model	Diameter	Ring Width	Center Height	Weight (net)	Material
SCTM-33	30mm	25.4mm / 1"	25.4mm / 1"	130g / 4.5 oz	6061-T6
SCTM-34			31.75mm / 1.25"	143g / 5.0 oz	
SCTM-35		38mm / 1.5"	38mm / 1.5"	155g / 5.5 oz	
SCTM-30	35mm	25.4mm / 1"	28mm / 1.1"	135g / 4.7 oz	
SCTM-31			35mm / 1.4"	155g / 5.5 oz	
SCTM-32			40mm / 1.6"	165g / 5.8 oz	
SCTM-38	30mm		38mm / 1.5"	130g / 4.5 oz	
SCTM-52	34mm	25.4mm / 1"	28mm / 1.1"	135g / 4.7 oz	
SCTM-53			35mm / 1.4"	155g / 5.5 oz	
SCTM-54			40mm / 1.6"	165g / 5.8 oz	



SCTM-38  
Dovetail



# Mark & Steel Scope Mount & Ring



Model	Diameter	Length	Center Height	Weight (net)	Aluminum Alloy	Steel	Quick-Detach
SCTM-27	30mm	16mm / 0.6"	21mm / 0.83"	105g / 3.7 oz	●		
SCTM-37	25.4mm		25.4mm / 1"	113g / 4.0 oz	●		
SCTM-22	30mm		25.4mm / 1"	120g / 4.2 oz	●		
SCTM-08	30mm		31mm / 1.2"	130g / 4.6 oz	●		
SCSR-01	25.4mm		17mm / 0.7"	135g / 4.8 oz		●	●
SCSR-04	30mm		19mm / 0.75"	160g / 5.6 oz		●	●
SCSR-02	25.4mm		21mm / 0.83"	160g / 5.6 oz		●	●
SCSR-05	30mm		21mm / 0.83"	175g / 6.2 oz		●	●
SCSR-03	25.4mm		27mm / 1.1"	180g / 6.4 oz		●	●
SCSR-06	30mm		27mm / 1.1"	205g / 7.2 oz		●	●

# Universal Scope Mount & Ring



SCOT-52B

SCOT-52C

SCOT-52D



SCOT-54A

SCOT-54C

SCOT-54D



SCOT-53A

SCOT-53B

SCOT-53C



SCOT-55A

SCOT-55B

SCOT-55C



## SCTM-21 Scope Ring

- Top Rail Length: 45mm / 1.8"
- Ring Length: 18mm / 0.7"
- Weight(net): 28g / 1.0oz
- Aluminum



## SCTM-05 Barrel Picatinny

- Length: 46mm / 1.8"
- Height: 38mm / 1.5"
- Weight(net): 50g / 1.8oz
- Aluminum



## SCTM-17 Flip to Side

- Base Length: 32mm / 1.2"
- Height: 36mm / 1.4"
- Weight(net): 110g / 3.9oz
- Aluminum

Model	Diameter	Ring Width	Center Height	Weight (net)	Material
SCOT-52B	25.4mm	21mm / 0.8"	22mm / 0.9"	57g / 2.0 oz	6061-T6
SCOT-52C			26mm / 1.0"	61g / 2.1 oz	
SCOT-52D			30mm / 1.2"	66g / 2.3 oz	
SCOT-53A			22mm / 0.9"	75g / 2.6 oz	
SCOT-53B	26mm / 1.0"		86g / 3.0 oz		
SCOT-53C	34mm / 1.3"		106g / 3.7 oz		
SCOT-54A	30mm		22mm / 0.9"	36g / 1.3 oz	
SCOT-54C			28mm / 1.1"	52g / 1.8 oz	
SCOT-54D			36.5mm / 1.44"	60g / 2.1 oz	
SCOT-55A			55mm / 2.2"	205g / 7.2 oz	
SCOT-55B			55mm / 2.2"	205g / 7.2 oz	
SCOT-55C			55mm / 2.2"	205g / 7.2 oz	



# 34 / 35mm Dia. Scope Mount & Ring



SCTM-09 Tri-Rail Picatinny



SCTM-12 20MOA Picatinny



SCTM-29 Offset Picatinny



SCQD-10 20MOA Picatinny QD

Model	Diameter	Length	Center Height	Weight (net)	Material
SCTM-23A	35mm	18mm / 0.7"	10.4mm / 0.4"	110g / 3.9 oz	6061-T6
SCTM-23B	34mm		10.4mm / 0.4"	110g / 3.9 oz	
SCTM-06A	35mm	18mm / 0.7"	32mm / 1.2"	196g / 6.9 oz	
SCTM-06B	34mm		32mm / 1.2"	122g / 4.3 oz	
SCTM-09	35mm	141mm / 5.6"	40mm / 1.6"	283g / 10.0 oz	
SCTM-29		141mm / 5.6"		283g / 10.0 oz	
SCTM-12		140mm / 5.5"		240g / 8.5 oz	
SCQD-10	35mm	140mm / 5.5"	40mm / 1.6"	222g / 7.8 oz	



### SCTM-28 Scope Ring

- Top Rail Length: 45mm / 1.8"
- Ring Length: 18mm / 0.7"
- Weight(net): 32g / 1.2oz
- Aluminum

# Quick Release Scope Mount & Ring



Model	Diameter	Length	Center Height	Weight (net)	Material
SCQD-03	30mm	22mm / 0.9"	38mm / 1.5"	155g / 45.4 oz	6061-T6
SCQD-04			38mm / 11.5"	196g / 6.9oz	
SCQD-07	25.4mm		40mm / 1.6"	275g / 9.7oz	
SCQD-08			35mm / 1.25"	150g / 5.3 oz	
SCQD-09	35mm	25.4mm / 1"	38mm / 1.5"	196g / 6.9oz	



# 30mm One-Piece Scope Mount & Ring



SCTM-24A Extended Picatinny



SCTM-24B Extended Picatinny XL



SCTM-07B Tri-Rails Long Picatinny



SCTM-36 1.25" Profile Picatinny



SCTM-39 20MOA 1.25" Profile Picatinny



SCOP-04 High Dovetail



SCOP-05 Low Weaver



SCOP-16 Dovetail 20MOA

Model	Diameter	Overall length	Center Height	Weight (net)	Material	
SCTM-24A	30mm	135mm / 5.3"	22mm / 0.9"	57g / 2.0oz	6063-T6	
SCTM-24B		165mm / 6.5"	26mm / 1.0"	61g / 2.1oz		
SCTM-07B		150mm / 5.9"	30mm / 1.2"	66g / 2.3oz	6061-T6	
SCTM-36		137mm / 5.4"	22mm / 0.9"	75g / 2.6oz	6063-T6	
SCTM-39		146mm / 5.7"	26mm / 1.0"	86g / 3.0oz		
SCOP-04		100mm / 3.9"		34mm / 1.3"	106g / 3.7oz	6061-T6
SCOP-05				22mm / 0.9"	36g / 1.3oz	6061-T6
SCOP-16		120mm / 4.7"		28mm / 1.1"	52g / 1.8oz	6061-T6

## 30mm Precise Integral Offset Rings



# Snap Cap



SCSC-01  
223 Rem



SCSC-03  
.300



SCSC-05  
7.62x51mm



**Great for Checking & Adjusting Trigger Pull**  
**The Most Realistic Outward, Feeling, Balance & Weight Possible**  
**Ideal for Real Firearms Training Drills**



SCSC-02  
7.62x39mm



SCSC-01  
9mm



SCSC-06  
30-06



# Gun Cleaning Tools



**SCCK-01**  
Universal Gun  
Cleaning Kit



- Cleaning rods
- Fitting handle
- Bronze brush
- Cotton mop
- Spring brush
- Utility brush
- Patch holder
- Muzzle guard
- Gun oil bottle
- Box of patches
- Adapter
- Storage box with blister



**SCCK-06**  
.45



**SCCK-02**  
.223 / 5.56



**SCCK-07**  
.270 / 7mm



**SCCK-03**  
.308



**SCBM-01**  
AR15 Rubber Bench Mat



**SCBM-02**  
G-Pistol Rubber Bench Mat



**SCCK-08**  
12GA Shotgun



**SCCK-04**  
9mm



**SCCK-09**  
410 Gauge Shotgun



**SCCK-05**  
12GA



**SCBM-03**  
M1911 Rubber Bench Mat



**SCBM-04**  
AK47 Rubber Bench Mat



**SCCK-10**  
.177 & .22 Airgun

# Scope Accessories



**SCOT-06**  
Scope Ocular  
Rubber Cover



**SCOT-44**  
Scope Coat (S/M/L)



**SCOT-13**  
Honeycomb  
Filter Sunshade



**SCOT-47P**  
Paragon Scope  
Big Side Wheel



**SCOT-47M**  
Marksman Scope  
Big Side Wheel



**SCCC-01**  
Cleaning Cloth



**SCCC-02**  
Deluxe Cleaning Cloth



**SCOT-59**  
Red Dot Protection Cap



**SCOT-59II**  
29mm Red Dot Sight Cap



**SCOT-57D45**  
Rifle Scope D45 Throw Lever




**SCOT-57FF**  
Rifle Scope Throw Lever



**SCOT-61**  
Rifle Scope Plastic Wrench



# GunSmith Tool

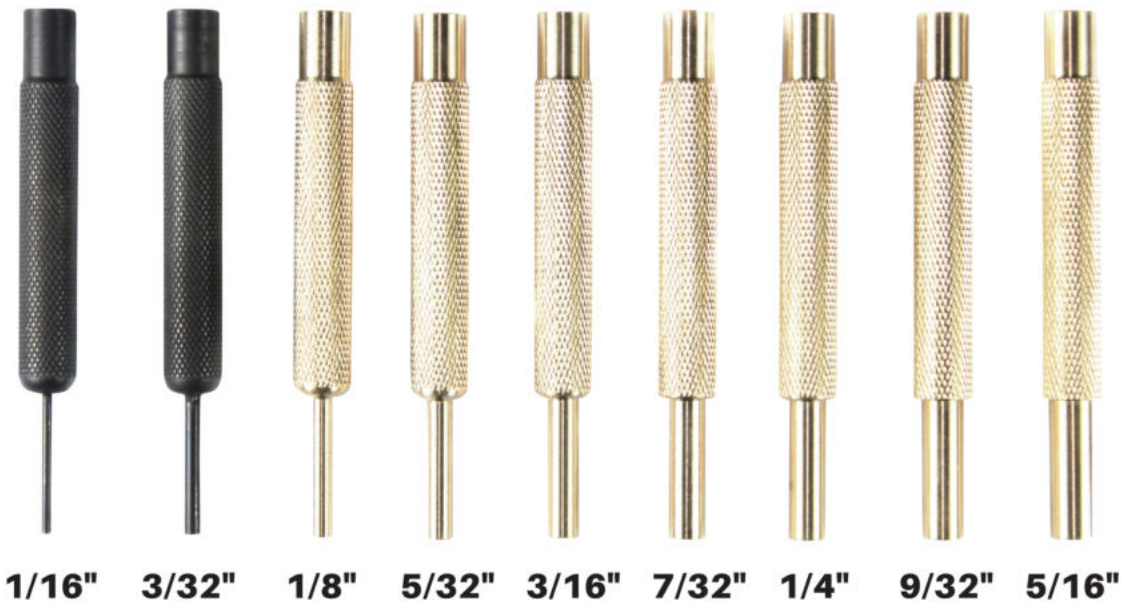

**SCOT-46**  
Punch Tool Kit



**SCTK-01**  
Delta Ring Removal Wrench



**SCTK-02**  
AR15 Armorer's Barrel Wrench



**SCOT-58**  
Gun Bore Gauge

# Others



**SCTS-01**  
T-Shirt MG



**SCTS-02**  
T-Shirt WH



**SCTS-03**  
T-Shirt BL



**SCOT-05**  
Scope Dovetail  
Recoil Stopper



**SCOT-11**  
Pistol Rubber  
Grip Cover



**SCOT-12**  
Shooting Stick



**SCOT-15**  
30 / 25.4mm  
Plastic Round  
Adapter



**SCOT-21**  
Pistol Grip  
Cover Gen2



**SCOT-23**  
Rail Rubber Cover



**SCOT-35**  
Gun Lock



**SCOT-36**  
QD Sling  
Weaver Mount



**SCSR-07**  
98K Scope  
Turret Mount



**SCA-70**  
98K Steel  
Rail Mount



**SCBB-01**  
Triple Play  
Bench-Bag Set



**SCFA-09**  
AC / DC  
Battery Charger



**SCFA-07/08**  
18650 Rechargeable  
/ 16340 / 123A  
Battery



**SCOT-51**  
Bolt Action  
Silicon Cover